


Superwind Mast Kit, Custom Made by Klacko Marine In Canada

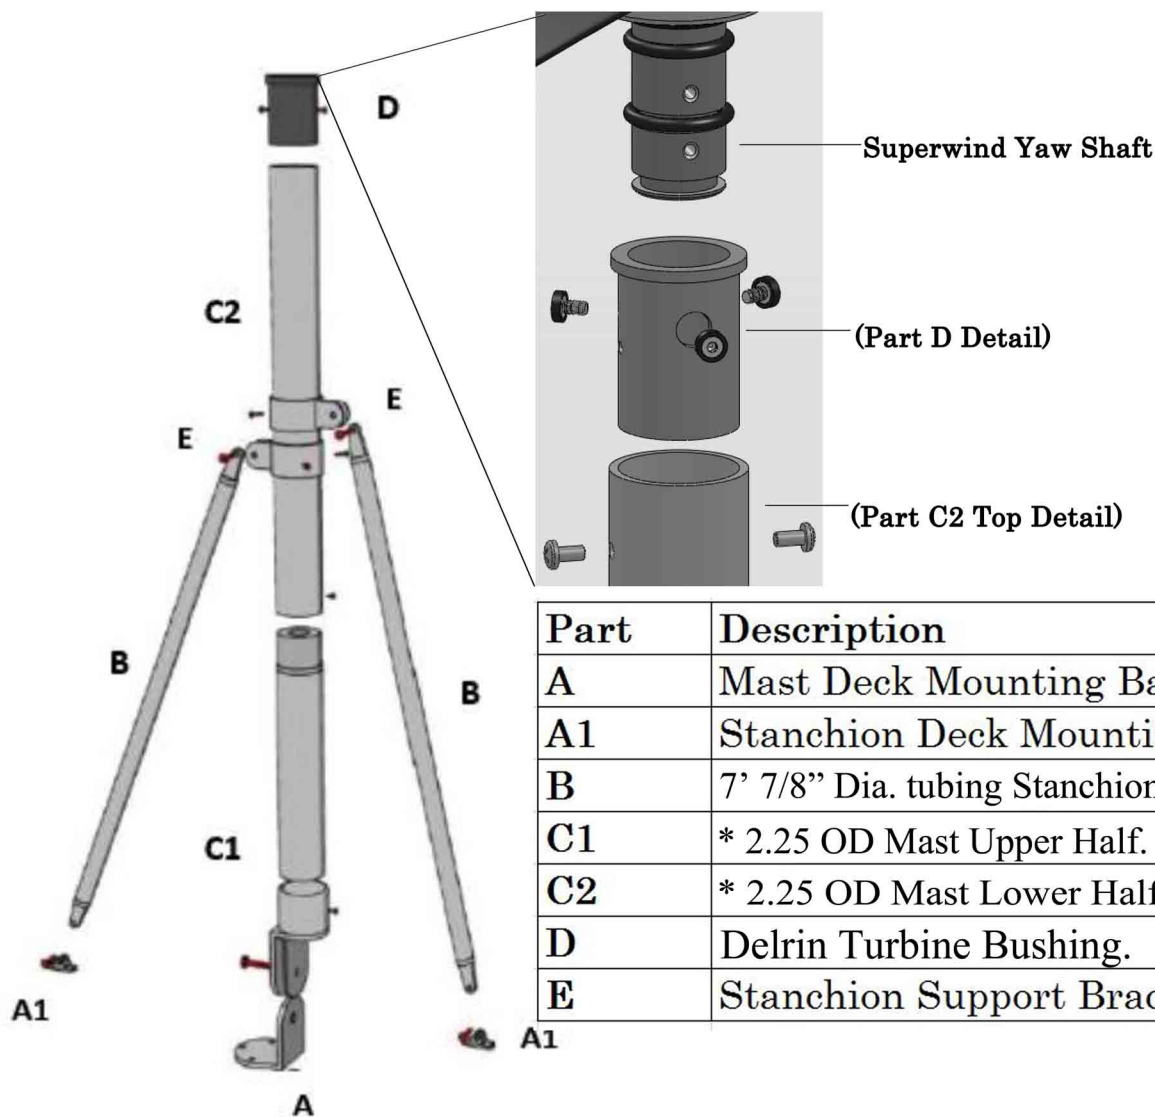

See Page 17 of the superwind manual for complete installation instructions.

The Stanchion support bracket parts (E) require the only holes that must be drilled and tapped on the mast kit by the end user.

Due to the custom mounting of the stanchions for each application, these holes will have to be drilled and taped in their final mounted positions. The holes will need to accommodate 1/4-20 (~7/32 tap size drill)

The screw to be used is provided with part (E).

* Mast components are made of polished 316L Stainless Steel.

16ga Wall thickness **2.25 OD**. All tubing and plate are USA sourced.